


FLOWMATIC WHEEL FEEDERS

Pride of the Farm® Flowmatic Wheel Feeders have a unique design, in use for over 25 years, which minimizes feed waste. Animals turn a multi-spoke wheel which sweeps feed into the trough. Bump bars located inside the hopper agitate the feed to keep it moving. Feed stops flowing when animals stop moving the wheel, reducing waste. There are no doors which can be a maintenance item. The trough is effectively self cleaning. The feeder is designed so that rain or snow will not wick up into the feeder hopper. Feed flow is easily changed with a side mounted adjustment system.

The trough, cone and hopper are constructed of fiber glass reinforced resins. Hopper shells and cover are heavy gauge galvanized steel. Our feeders work well in open lots and fabric buildings. They can be filled with a feed wagon or installed with automatic fill systems. Not designed for pigs under 50 lbs.

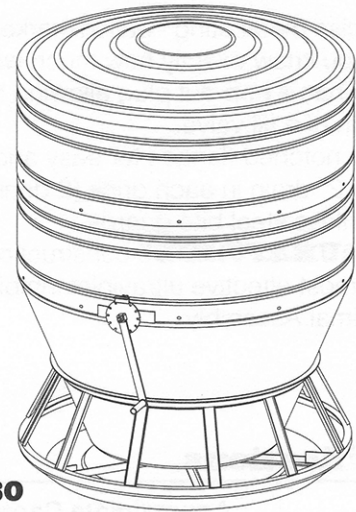

WF60

Specifications

Model Number	Approx. Capacity		Feed Openings	Dimensions in Inches (cm)							Shipping Weight lb (kg)
	Animals	BU (kg)		Feed Opening Front to Back	Feed Opening Width	Trough Diameter	Trough Depth	Hopper Diameter	Height With Cover	Height Without Cover	
WF40	60 Hogs	40 (909)	12	9 (22.9)	12 (30.5)	55 (139.7)	5 (12.7)	57 (144.8)	59 (149.9)	54 (137.2)	415 (188.6)
WF60	60 Hogs	60 (1364)	12	9 (22.9)	12 (30.5)	55 (139.7)	5 (12.7)	57 (144.8)	75 (190.5)	70 (177.8)	447 (203.2)
WF80	60 Hogs	80 (1818)	12	9 (22.9)	12 (30.5)	55 (139.7)	5 (12.7)	57 (144.8)	91 (231.1)	86 (218.4)	485 (220.5)

Truck only.

All feeder capacities are approximate.